




Technical File

Keen Line - Floor Screen | Acrylic Guard

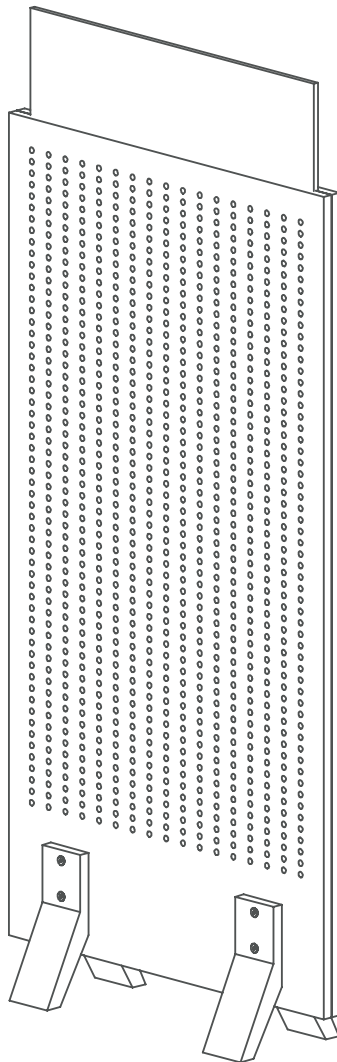

01

Dimensions

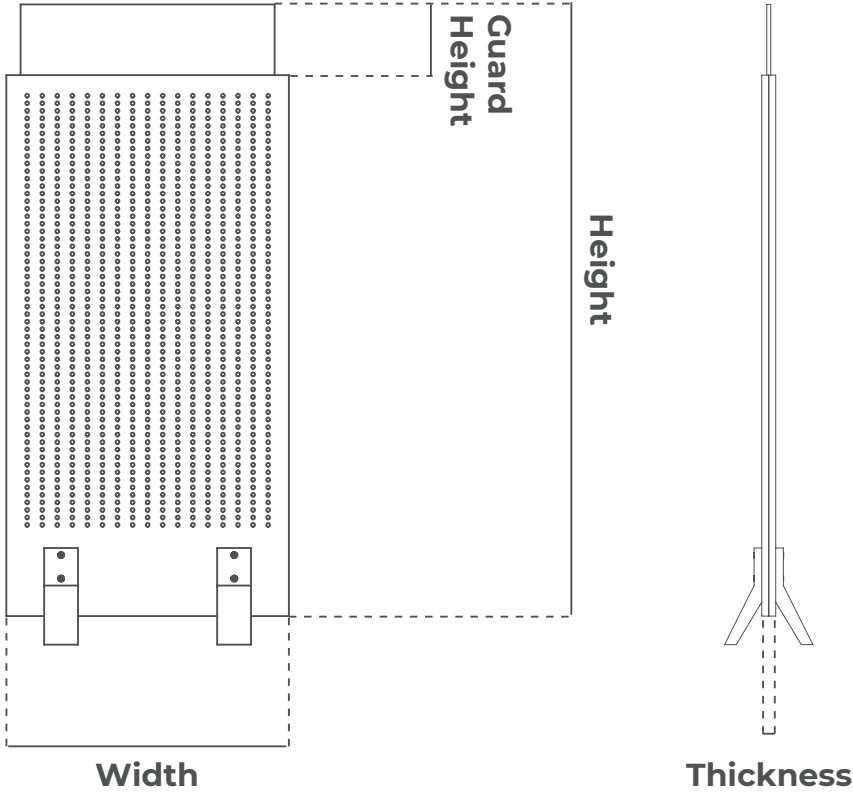

Floor Screen | Acrylic Guard

Width: 600mm	Height: 1350mm	Acrylic Guard Height: 150mm	Thickness: 24mm
Width: 600mm	Height: 1650mm	Acrylic Guard Height: 150mm	Thickness: 24mm
Width: 800mm	Height: 1350mm	Acrylic Guard Height: 150mm	Thickness: 24mm
Width: 800mm	Height: 1650mm	Acrylic Guard Height: 150mm	Thickness: 24mm


02

Finishes



Composition Painted Birch Plywood
Thickness 15 mm
FSC certified
PEFC certified
Harvested under EU timber regulations

Lacquered Finish
White




Composition Painted Birch Plywood
Thickness 15 mm
FSC certified
PEFC certified
Harvested under EU timber regulations

Lacquered Finish
Grey




Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfected
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish
Beige Gaudi




Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfected
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish
Grey Stone



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfectable
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish
Lino Blanco



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfectable
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish
Lino Gris



Thickness 8 mm
Transparency Clear

Acrylic
Clear