



Technical File

Klever Line - Floor Screen | Acrylic Guard

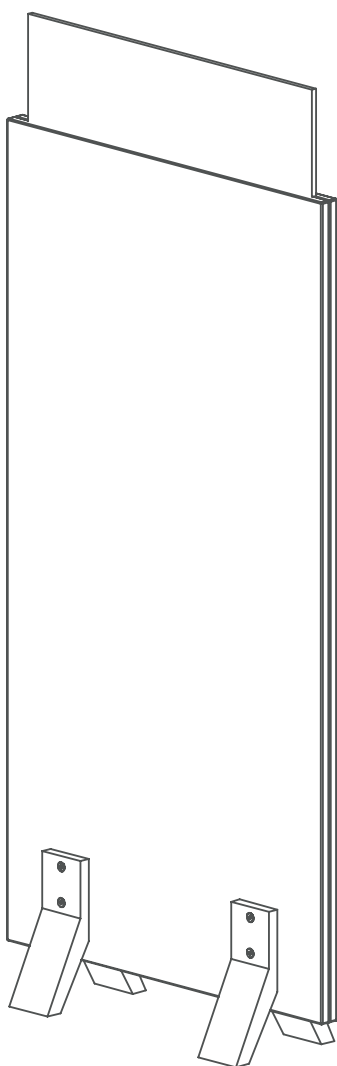

01

Dimensions

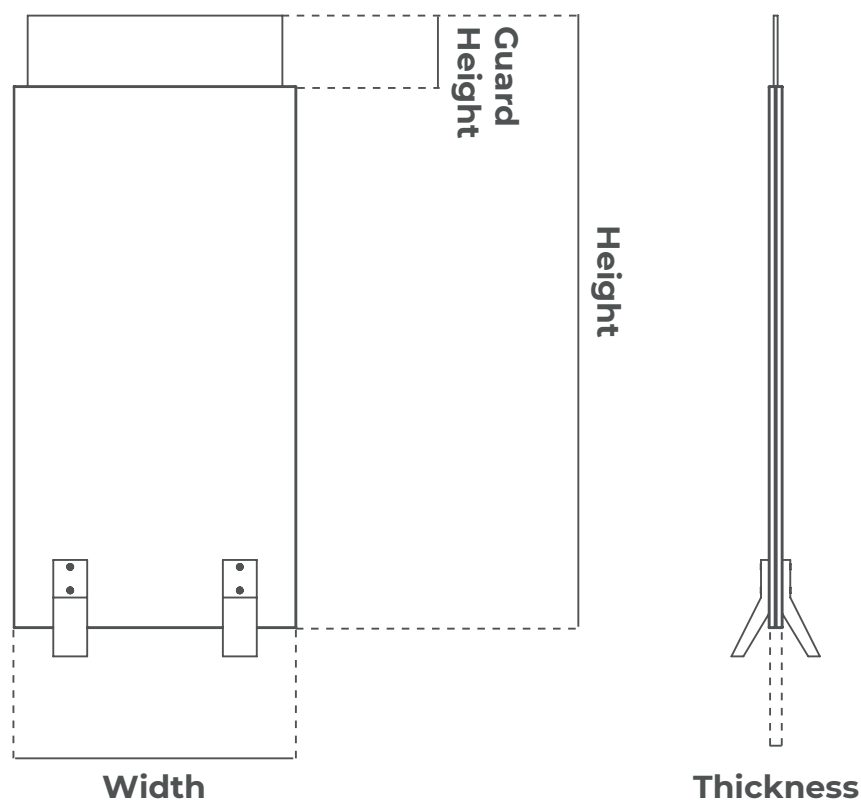

Floor Screen | Acrylic Guard

Width: 600mm	Height: 1350mm	Acrylic Guard Height: 150mm	Thickness: 28mm
Width: 600mm	Height: 1650mm	Acrylic Guard Height: 150mm	Thickness: 28mm
Width: 800mm	Height: 1350mm	Acrylic Guard Height: 150mm	Thickness: 28mm
Width: 800mm	Height: 1650mm	Acrylic Guard Height: 150mm	Thickness: 28mm

02

Finishes



Composition 100% Polyester
Colour Fastness to light DIN 54004
Flame Retardancy DIN 4102 B2
Abrasion resistance 300.000 cycles
Antibacterial, Antifungal and Antimycotic Protection
Anti-Stain finish
Anti-static finish

Faux Leather Finish
Auster



Composition 100% Polyester
Colour Fastness to light
Flame Retardancy
Abrasion resistance
Antibacterial, Antifungal and Antimycotic Protection
Anti-Stain finish
Anti-static finish

Faux Leather Finish
Leinen




Composition 100% Polyester
Colour Fastness to light
Flame Retardancy DIN 4102 B2
Abrasion resistance 300.000 cycles
Antibacterial, Antifungal and Antimycotic Protection
Anti-Stain finish
Anti-static finish

Faux Leather Finish
Pure White



Composition 100% Polyester
Colour Fastness to light
Flame Retardancy
Abrasion resistance
Antibacterial, Antifungal and Antimycotic Protection
Anti-Stain finish
Anti-static finish

Faux Leather Finish
Taupe



Woven Fabric Finish Glass

Composition 100% Polypropylene

Weight 220 g/m²

Flammability EN 1021-1 (cigarette) // BS 476 Part 7 Class 1 (Adhered)
EN 13501-1 (SBI) Adhered Class B, s2, d0

Light Fastness 6 (ISO 105 - B02)


Fastness to Rubbing Wet: 4, Dry: 4 (ISO 105 - X12)

Certified to the EU Ecolabel

Certified to Indoor Advantage™ Gold

Cleaning Vacuum regularly, wipe with a damp cloth using a proprietary upholstery shampoo/soap. For deeper cleaning, use bleach or alcohol.

Bleach Cleanable ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution



Woven Fabric Finish Easdale

Composition 100% Polypropylene

Weight 220 g/m²

Flammability EN 1021-1 (cigarette) // BS 476 Part 7 Class 1 (Adhered)
EN 13501-1 (SBI) Adhered Class B, s2, d0

Light Fastness 6 (ISO 105 - B02)


Fastness to Rubbing Wet: 4, Dry: 4 (ISO 105 - X12)

Certified to the EU Ecolabel

Certified to Indoor Advantage™ Gold

Cleaning Vacuum regularly, wipe with a damp cloth using a proprietary upholstery shampoo/soap. For deeper cleaning, use bleach or alcohol.

Bleach Cleanable ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution



Woven Fabric Finish Lead

Composition 100% Polypropylene

Weight 220 g/m²

Flammability EN 1021-1 (cigarette) // BS 476 Part 7 Class 1 (Adhered)
EN 13501-1 (SBI) Adhered Class B, s2, d0

Light Fastness 6 (ISO 105 - B02)


Fastness to Rubbing Wet: 4, Dry: 4 (ISO 105 - X12)

Certified to the EU Ecolabel

Certified to Indoor Advantage™ Gold

Cleaning Vacuum regularly, wipe with a damp cloth using a proprietary upholstery shampoo/soap. For deeper cleaning, use bleach or alcohol.

Bleach Cleanable ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution



Woven Fabric Finish
Beltane

Composition 100% Polypropylene

Weight 220 g/m²

Flammability EN 1021-1 (cigarette) // BS 476 Part 7 Class 1 (Adhered)

EN 13501-1 (SBI) Adhered Class B, s2, d0

Light Fastness 6 (ISO 105 - B02)

Fastness to Rubbing Wet: 4, Dry: 4 (ISO 105 - X12)

Certified to the EU Ecolabel

Certified to Indoor Advantage™ Gold

Cleaning Vacuum regularly, wipe with a damp cloth using a proprietary upholstery shampoo/soap. For deeper cleaning, use bleach or alcohol.

Bleach Cleanable ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution



Acrylic
Clear

Thickness 8 mm

Transparency Clear
