





Technical File

Keen Line - Free Standing

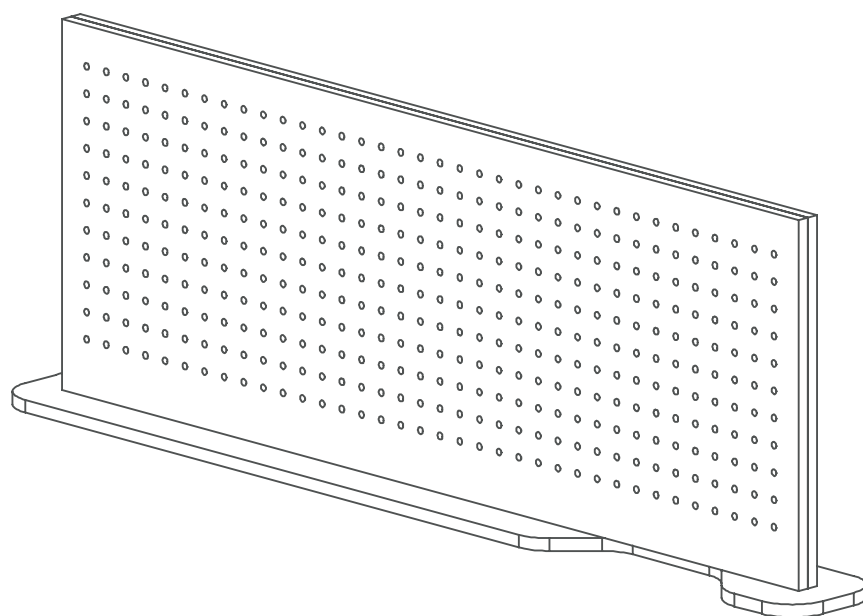

01


Dimensions

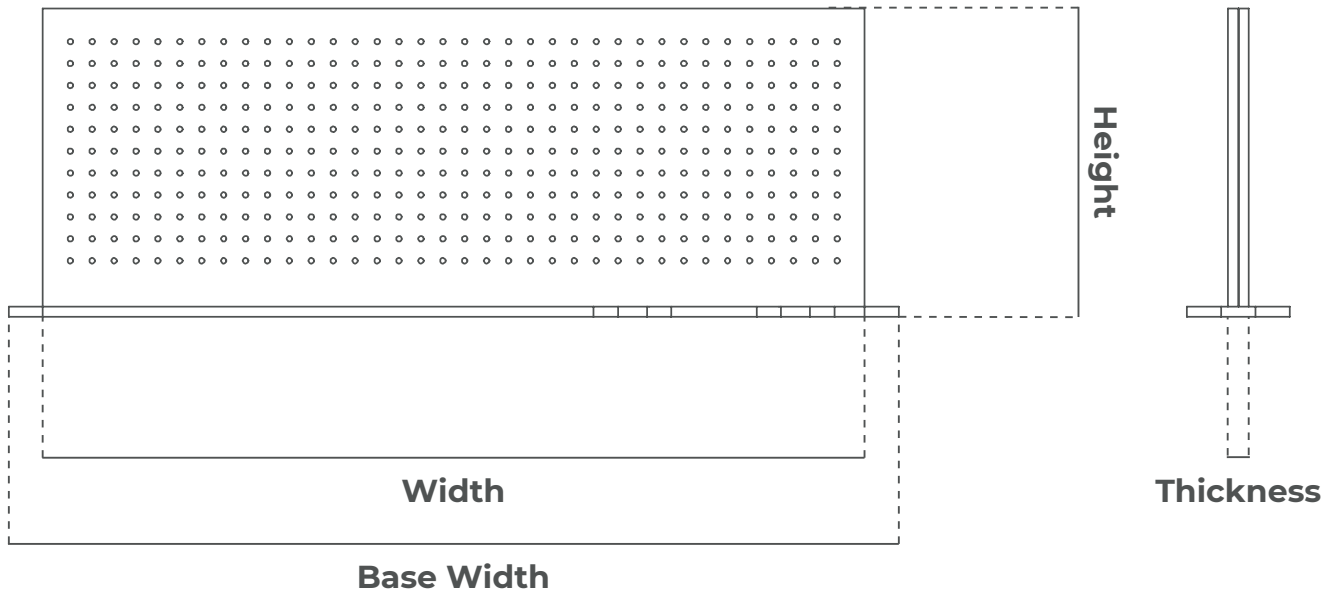

Free Standing

LATERAL

Width: 600mm Base Width: 650mm Height: 450mm Thickness: 24mm
 Width: 700mm Base Width: 750mm Height: 450mm Thickness: 24mm

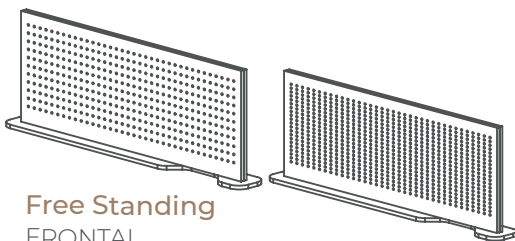

Free Standing

FRONTAL

Width: 1200mm Base Width: 1300mm Height: 450mm Thickness: 24mm
 Width: 1400mm Base Width: 1500mm Height: 450mm Thickness: 24mm
 Width: 1600mm Base Width: 1700mm Height: 450mm Thickness: 24mm
 Width: 1800mm Base Width: 1900mm Height: 450mm Thickness: 24mm


02

Finishes



Composition Painted Birch Plywood
Thickness 15 mm
FSC certified
PEFC certified
Harvested under EU timber regulations

Lacquered Finish
White




Composition Painted Birch Plywood
Thickness 15 mm
FSC certified
PEFC certified
Harvested under EU timber regulations

Lacquered Finish
Grey




Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfected
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish
Beige Gaudi




Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfected
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish
Grey Stone



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfectable
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish
Lino Blanco



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfectable
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish
Lino Gris



Thickness 8 mm
Transparency Clear

Acrylic
Clear